


EARTHING AND SHORT - CIRCUIT EQUIPMENT MEDIUM VOLTAGE OVERHEAD LINES - AUTOMATIC CLAMPS



Mod. PATL-MC

Medium voltage overhead lines - Automatic clamps

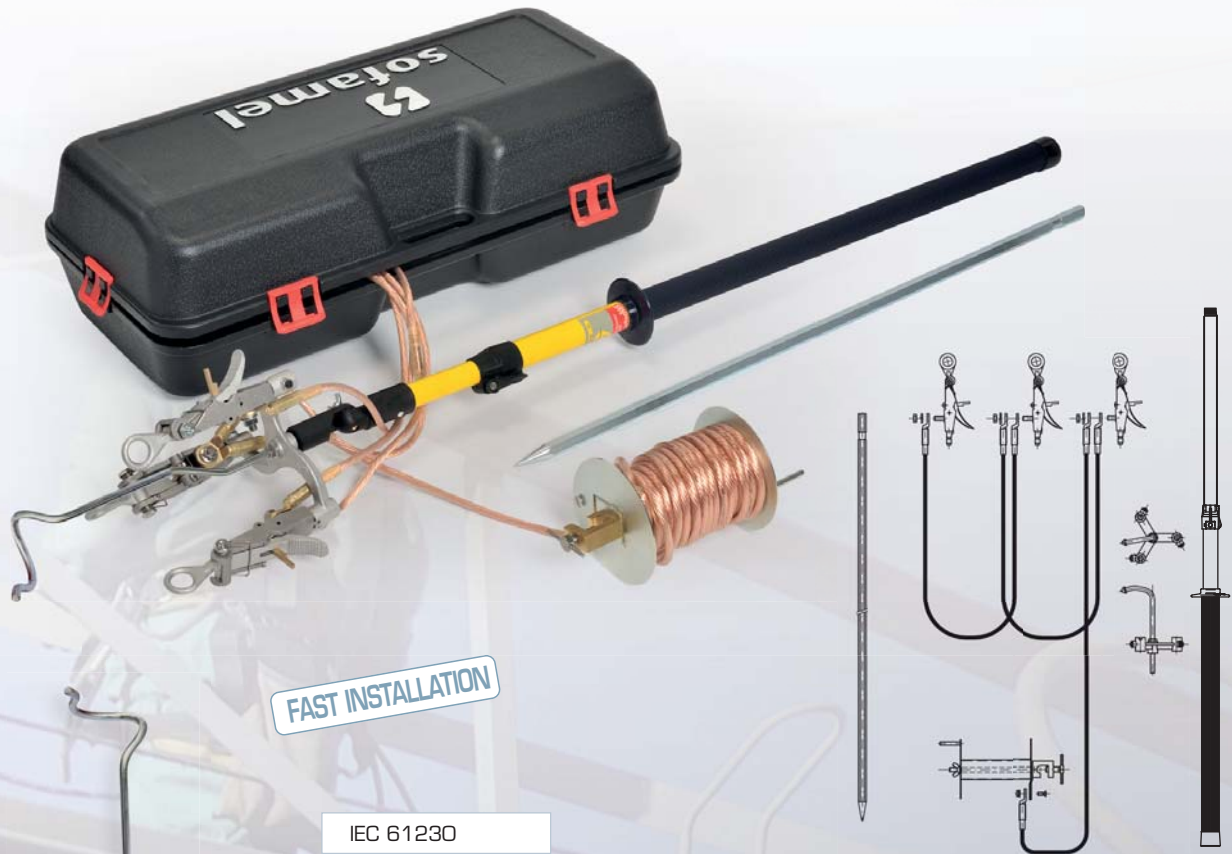

FAST INSTALLATION

IEC 61230

Earthing and short-circuit equipment for medium voltage overhead lines. The main aim for its installation is operator's protection against an accidental commissioning or possible voltage return during repair operations. The MC clamp is fixed on bare conductors by pressure and can be removed by an operating hook. The three clamps can be placed at the same time thanks to the dispenser head facilitating operator's work. According to IEC 61230 standard.

Composed of:

- 3 MC aluminium alloy clamps with automatic activation fastening for cylindrical conductors with diameter between 3 and 20 mm.
- 1 dispenser head with hook with M-10 thread.
- 2 copper cables with PVC insulation of 16/25/35 mm² section depending on model and 2,5 m long.
- 1 copper cable with PVC insulation of 16/25 mm² section depending on model and 15 m long.
- 1 metallic coil to store the 15 m of earthing cable.
- 1 telescopic pole [1,10 m folded and 2 m extended] with anchorage button.
- 1 earthing rod.
- 1 plastic case to store and transport the equipment.
- 1 bag to store and transport the pole and the earthing rod.

Code 671126



Code	Ref.	Short circuit current Max. ICC
660225	PATL-MC/1616	4,0 KA/1s
660230	PATL-MC/2516	6,9 KA/1s
660240	PATL-MC/3525	9,0 KA/1s

sofamel