CONNECTABLE MULTIUSE POLES

Poles according to IEC 60855 and UNE 204003 standards with two or three connectable sections, made of polyester and fibreglass tube Ø 39 mm and polyurethane foam-filled.
Head: U (Universal), B (Bayonet).
It incluides a carrying bag.

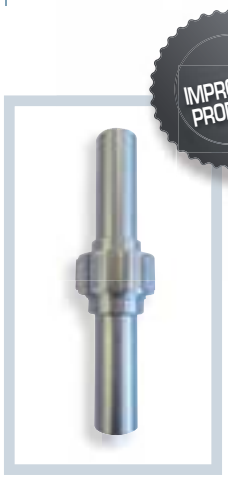

IEC 60855
UNE 204003

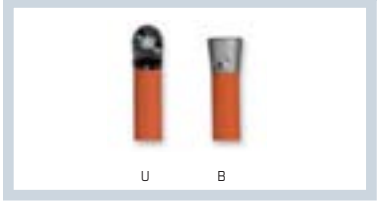

Mod. BSC-A43

- Extended length 3,5 meters
- Composed of 1 section of 2 m and 1 section of 1,5 m
- Working voltage: 132 kV
- For INDOOR and OUTDOOR use (Humid environment)

Code	Ref.
616724	BSC-A43U
616725	BSC-A43B

Mod. BSC-A44

- Extended length 4 meters
- Composed of 2 sections of 2 m each
- Working voltage: 220 kV
- For INDOOR and OUTDOOR use (Humid environment)

Code	Ref.
616726	BSC-A44U
616727	BSC-A44B

Mod. BSC-A54

- Extended length 4,5 meters
- Composed of 1 section of 2 m + 1 section of 2,5 m
- Working voltage: 220 kV
- For INDOOR and OUTDOOR use (Humid environment)

Code	Ref.
616728	BSC-A54U
616729	BSC-A54B

Mod. BSC-A55

- Extended length 5 meters
- Composed of 2 sections of 2,5 m each
- Working voltage: 380 kV
- For INDOOR and OUTDOOR use (Humid environment)

Code	Ref.
616730	BSC-A55U
616731	BSC-A55B

Mod. BSC-A66

- Extended length 6 meters
- Composed of 2 sections of 3 m each
- Working voltage: 380 kV
- For INDOOR and OUTDOOR use (Humid environment)

Code	Ref.
616732	BSC-A66U
616733	BSC-A66B

Mod. BSC-A444

- Extended length 6 meters
- Composed of 3 sections of 2 m each
- Working voltage: 380 kV
- For INDOOR and OUTDOOR use (Humid environment)

Code	Ref.
616734	BSC-A444U
616735	BSC-A444B