VOLTAGE DETECTORS

BIPOLAR VOLTAGE DETECTOR

Bipolar voltage detector with OLED screen

Optical & Acoustic

Bipolar voltage detector with digital display OLED to be used in MV networks.
Internal and external use in dry environment.
Voltage range: from 3 to 36 kV AC.
Automatic start-up when voltage is detected.
Auto turn-off to standby mode after two minutes WITHOUT VOLTAGE DETECTION. In this mode consumption is less than 1µA.
Doble indication of concordance-discordance by LED lights, reading on digital display, and high acoustic pressure buzzer.
Removable antenna.
Power supply: 9v alkaline battery, type 6LR61.

Functionalities:
Phase comparator
Fuse tester
Voltage meter (True RMS)
Network analizer
Displaying of Labor Statistics
Menu languages: English - Spanish - French

Mod. VBD-3/36

- Rated voltage: from 3 to 36 kV AC
- LED optical indication
- Frequency: 50 or 60 Hz AC
- Type: resistive
- S class with extension of the contact electrode
- Climatic category N, climatic conditions for use and storage, temperature from -25°C to +55°C, and humidity from 20 to 96%
- Indoor and outdoor use in dry environment

Code	Ref.	Hz	kV
650105	**VBD-3/36-50Hz**	50	3 to 36

Code	Ref.	Hz	kV
650110	**VBD-3/36-60Hz**	60	3 to 36

Accessories VBD check and 45° angle antenna not included.

Mod. VBD CHECK

Code	Ref.
650108	**VBD CHECK**

45°ANGLE ANTENNA

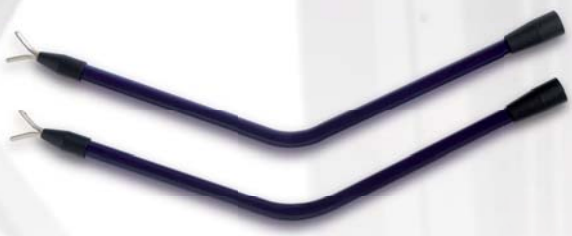

Code	Ref.
650107	**45°ANGLE ANTENNA**

sofamel